

Lint Trap Installation Manual

The Lint Trap can be used as a secondary lint catch device or used in conjunction with our dryer booster fan.

- If used with a dryer booster, it is recommended to mount the lint trap before the fan, less than 15 linear duct feet from the dryer.
- The Lint Trap should be mounted at an easy access point behind the dryer so you can clean it periodically.
- The Lint Trap should always be inspected and cleaned before the use of the dryer, as this will decrease drying times and help prevent any hazardous lint build-up.
- Installation of the Lint Trap is made simple. All that it requires is 4 screws to mount the Lint Trap directly on or in the wall behind the dryer or your desired location. Connect the ductwork to each end of the Lint Trap with duct tape, and installation is complete.

- Tips:
 1. Make sure that there are no metal screws protruding the duct work.
 2. If you would like to have the lint trap recessed, the hole in the wall must be atleast 6 3/4 inches by 6 3/4 inches.

- **Secured Turn Key Lid Fastening System:**
 1. Follow the directions on the lid itself for locking and unlocking the turn keys.
 2. Turn Keys will rotate and lock into position so that lid will not pop off.
 3. Simply rotate turn keys opposite direction to unlock lid and open unit to clean out.




Features:


- **UL approved flame resistant polymer materials (UL94, V-2)**
- Full peripheral 7/8" drywall frame for recessed applications
- Removable lint screen
- 5 7/8" depth to allow installation in 6" stud wall
- 360 degree mounting capability
- Clear viewing door for easy determination of lint build-up
- Slip on collars for easy duct connection
- Turn Key locks for secured lid fastening

****IT IS RECOMMENDED THAT YOU DO A THOROUGH CLEANING OF YOUR DUCT AND EXHAUST FITTING (GOOSE NECK/SCREEN) BEFORE INSTALLING THE LINT TRAP. IF THE DUCT IS NOT CLEAN AND RESTRICTING AIRFLOW, LEAKS MIGHT OCCUR.**

Top View

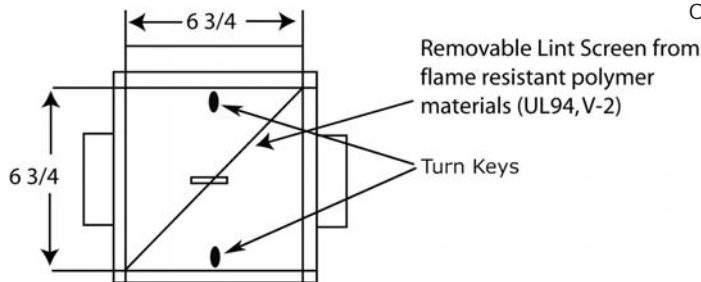

Side View

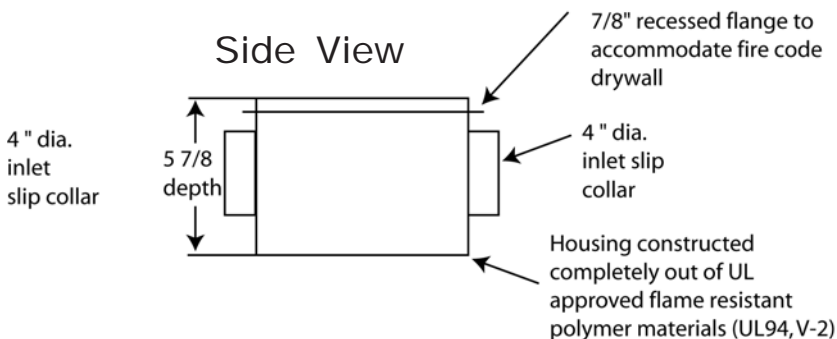

Top Door View

