

Supply and Exhaust Grill


These all new unique grills/diffusers are designed to be cosmetically appealing, easy to install, removable, adjustable, stainless steel spring clips for positive fixture, and of course quiet.

Better still, one grill may be used for supply and exhaust applications. The combination is what makes the Quiet Grill a desirable alternative to typical exhaust grills and supply air diffusers.

Each grill/diffuser is manufactured of high quality flame retardant, first grade polypropylene plastic that will not discolour over time. Full peripheral 1 1/4 x 3/8 foam gasket to ensure ceiling mate.


They are ideal for damp environments, and unlike metal alternatives, will not rust.

As capital as one can see the Quiet Grill concept offers many advantages over typical alternatives and provides cosmetic appeal, practicality and non-restrictive air performance.

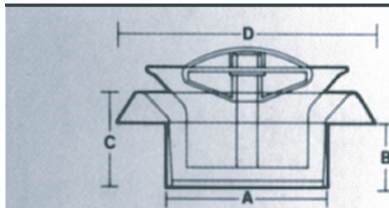

Model	A	B	C	D
HG45	3 9/16" (90mm)	2 5/16" (58mm)	3 1/16" (78mm)	6 1/4" (159mm)
HG56	4 11/16" (118mm)	2 1/2" (64mm)	3 1/4" (83mm)	7 13/16" (195mm)

Four Pre-Set Settings

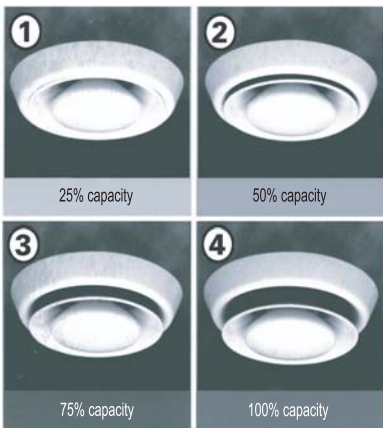

How to use performance chart

First a calculation must be made to establish how much airflow (cfm) is needed for the job.

Then the chart can be used to calculate how much static pressure (resistance) is being created by the grill.

Accessories

-White polymeric collar for flex duct connection

Installation as easy as 1,2,3



Can be installed directly into duct.